

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:

Program operator:

Declaration number:

Registration number:

ECO Platform reference number:

Issue date: Valid to:

Publisher:

NC Nordic Care AB

The Norwegian EPD Foundation

The Norwegian EPD Foundation

NEPD-3581-2173-EN

NEPD-3581-2173-EN

06.07.2022

06.07.2027

Jackie chair

NC Nordic Care AB

www.epd-norge.no







General information

Product:

Jackie chair

Owner of the declaration:

NC Nordic Care AB

Contact person: Moa Ulfsson Phone: +46 140 38 40 60 e-mail: moa.u@ncnordiccare.se

Program operator:

The Norwegian EPD Foundation
Pb. 5250 Majorstuen, 0303 Oslo

Phone: +47 23 08 80 00 e-mail: post@epd-norge.no Manufacturer:

NC Nordic Care AB

Declaration number:

NEPD-3581-2173-EN

Place of production:

NC Nordic Care AB

Ydrevägen 23, Box 30 SE 573 21 Tranås

Sweden

ECO Platform reference number:

Management system:

ISO 9001, ISO 14001, ISO 45001, FSC® (C010544)

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR NPCR 026:2018 Part B for furniture

Organisation no:

556249-9177

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Issue date:

06.07.2022

Valid to:

06.07.2027

Declared unit:

Year of study:

1 Pcs Jackie chair

2021

Declared unit with option:

Comparability:

 $\ensuremath{\mathsf{EPDs}}$ from programmes other than the Norwegian $\ensuremath{\mathsf{EPD}}$ Foundation may not be comparable

A1,A2,A3,A4

Functional unit:

1 psc, Jackie chair.

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annualy. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Developer of EPD:

Moa Ulfsson

Reviewer of company-specific input data and EPD:

Jan Jismyr

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Approved:

Sign

Erik Svanes, Norsus AS

(no signature required)

Håkon Hauan, CEO EPD-Norge

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	18,67
Total energy use	MJ	466,73
Amount of recycled materials	%	18,56



Product

Market:

Mainly Europe, but is available world wide.

Product description:

Jackie is a versatile family of easy chairs, sofas and chairs with different features and sizes, as well as tactile materials for variety, while maintaining an overall harmonious look.

The Jackie chair has been designed to meet all the identified needs of a care chair. It is a suspendable, stackable and sound absorbent armchair for easier cleaning, versatile furnishing and a good acoustic environment when required.

It is available in different widths and heights to suit different individuals, has a stable and non-tip full-length armrest with a grip on the back for support.

For more information please visit our webpage: https://www.ncnordiccare.se/produkter/jackie-131/

Product specification

Jackie 131

Stackable chair. Frame made of solid wood and seat and back in plywood and veneer.

The chair are available in a few different

materials and colours. This EPD is valid for the following options:

- Frame in solid wood, available in birch (FSC Mix) or oak (FSC Mix).
- Clear lacquer, stained black or white. Other colours on request.

For other options, see variants.

Read more under "additional information" on page 4

Technical data:

Total weight: 5,34 kg (packaging excluded) Total weight: 7,14 kg (packing included)

Reference service life, product

15 years service life, 5 years warrant if no other indicated.

Reference service life, building

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Wood - Solid beech/birch	3,70	66,07	0,00	0,00
Wood - Plywood	1,08	19,29	0,00	0,00
Glue for wood	0,21	3,75	0,00	0,00
Lacquer, water based	0,05	0,89	0,00	0,00
Wood - Veneer	0,56	10,00	0,00	0,05
Total:	5,60		0,00	
Packaging	kg		Recycled share in material (kg)	Recycled share in material (%)
Packaging - Cardboard	1,80		1,37	76,30
Total including packaging	7,4		1,37	

LCA: Calculation rules

Declared unit:

1 Pcs Jackie chair

Cut-off criteria:

All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Allocation:

The allocation is made in accordance with the provisions of EN 15804. Effects of primary production of recycled materials is allocated to the main product in which the material was used. The recycling process and transportation of the material is allocated to this analysis.


Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Glue for wood	ecoinvent 3.4	Database	2017
Lacquer, water based	ecoinvent 3.4	Database	2017
Packaging - Cardboard	ecoinvent 3.4	Database	2017
Wood - Plywood	ecoinvent 3.4	Database	2017
Wood - Solid beech/birch	ecoinvent 3.4	Database	2017
Wood - Veneer	S-P-00172	EPD	2017
Glue for wood	NORSUS	Database	2020



System boundary:

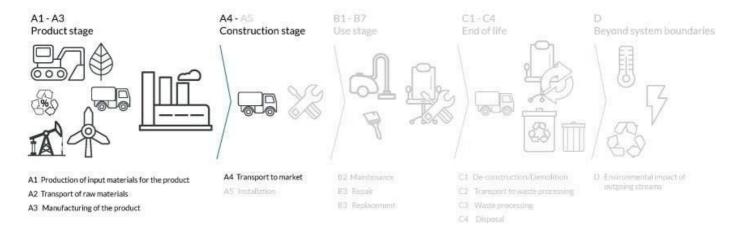

Additional technical information:

Jackie is tested according to EN 16139:2013 Furniture – Strength, durability and safety – Requirements for non-domestic seating. The product is FSC® -labelled in the following executions:

Birch and oak.

Jackie has been certified according to Swedish Möbelfakta requirements. Möbelfakta is a type 1 eco-label according to ISO 14024 for furniture that considers both quality, environment, and responsible supply chains. https://www.mobelfakta.se/Details.html?id=1030

Continue from page 3 Dimensions: Height 83 cm Width 50 cm Depth 57 cm Seat height 46 cm Seat depth 38 cm

Variants

Jackie 131 with upholstered seat and back. Fabric chosen by customer, HR-foam. Dimensions: Height 83 cm Width 50 cm Depth 57 cm

Depth 57 cm Seat height 46 cm Seat depth 38 cm

Jackie 132 Stackable chair with armrests. Dimensions: Height 83 cm Width 57 cm Depth 57 cm Seat height 46 cm Seat depth 38 cm

Jackie 132 with upholstered seat and back. Fabric chosen by customer, HR-foam. Dimensions: Height 83 cm Width 57 cm Depth 57 cm Seat height 46 cm

Seat depth 38 cm Arm height 66 cm

Arm height 66 cm



LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

At our site in Tranås, we only use electricity from renewable sources. A4 transport includes transport from NC Nordic Care, Tranås to Kinnarp (140km).

Transport from production place to user (A4)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck	38,8 %	Truck, 16-32 tonnes, EURO 6	165	0,043626	l/tkm	7,20
Railway					l/tkm	
Boat	50,0 %	Ship, Ferry transport (kgkm)	400	0,033522	l/tkm	13,41
Other Transportation					l/tkm	

85				

	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials fr ste treatment	kg	
Dust in the air	kg	
VOC emissions	kg	

Use (B1)

Unit	Value

Maintenance (B2)/Repair (B3)

maintenance (DZ)/Repair (D3)		
	Unit	Value
Maintenance cycle*	OCO	
Auxiliary	Char.	
Other resources	4//0	0
Water consumption	Scenario	J. 95
Electricity consumption	kWh	.(6
Other energy carriers	MJ	
Material loss	kg	
VOC emissions	kg	

Replacement (B4)/Refurbishment (B5)

	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

* Described above if relevant

Operational energy (B6) and water consumption (B7)

	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	WV.	

End	of	Life	(C1,	L.	1

	* Described above if relevant		
Ì	r .		
4	A 7		
	'/-A		
	14		
	are.		
	End of Life (C1, C 70.4		
	in.	Unit	Value
	End of Life (C1, C) Hazardous waste disposed Collected as mixed construction was Recycling Energy recovery	kg	
	Collected as mixed construction was 100	kg	
	Reuse	kg	
	Recycling		
			_
	Energy recovery		
	Energy recovery To landfill	kg	

Transport to waste processing (C2)

Туре	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (I/t)
Truck					I/tkm	
Railway					I/tkm	
Boat					I/tkm	
Other Transportation					I/tkm	



LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Pro	oduct sta	age	Construction installation stage			User stage End of life stage			User stage			d of life stage		Beyond the system bondaries		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De- construction demolition	Transport	W aste processing	Disposal	Reuse-Recovery- Recycling- potential
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	. D
Х	Χ	Х	Х	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	MND	. MND

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	3,03E+00	2,40E-01	1,54E+01	7,07E-01
ODP	kg CFC11 -eq	3,63E-07	4,51E-08	8,53E-07	1,27E-07
POCP	kg C ₂ H ₄ -eq	1,25E-03	3,74E-05	2,96E-03	2,34E-04
AP	kg SO ₂ -eq	1,33E-02	6,12E-04	7,42E-02	7,77E-03
EP	kg PO ₄ ³⁻ -eq	3,00E-03	7,91E-05	9,80E-03	9,46E-04
ADPM	kg Sb -eq	1,90E-05	7,38E-07	2,50E-05	1,47E-06
ADPE	MJ	4,45E+01	3,62E+00	1,71E+02	1,02E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer, POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water, EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Resource use

Parameter	Unit	A1	A2	A3	A4
RPEE	MJ	6,84E+01	5,32E-02	3,95E+01	1,24E-01
RPEM	MJ	1,13E+02	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	1,82E+02	5,32E-02	3,95E+01	1,24E-01
NRPE	MJ	5,05E+01	3,70E+00	3,05E+02	1,04E+01
NRPM	MJ	2,39E-02	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	5,05E+01	3,70E+00	3,05E+02	1,04E+01
SM	kg	1,37E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	5,34E-03	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
W	m ³	7,69E-02	6,97E-04	2,60E-01	1,65E-03

RPEE Renewable primary energy resources used as energy carrier, RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier, NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009 *INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	7,08E-04	2,19E-06	3,58E-04	6,97E-06
NHW	kg	9,62E-01	1,97E-01	3,72E+00	4,07E-01
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9,0 E-03 = 9,0*10-3 = 0,009

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4
CR	kg	8,25E-02	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	1,80E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9.0 E-03 = 9.0*10-3 = 0.009

*INA Indicator Not Assessed



Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Electricity mix	Data source	Amount	Unit
El-mix, Sweden (kWh)	ecoinvent 3.4 Alloc Rec	42,67	g CO2-ekv/kWh
Energy, electricity, European average: 1 kWh	ecoinvent 3.4	594,20	g CO2-ekv/kWh

Dangerous substances

The product contains substances given by the REACH Candidate list and the Norwegian priority list that are less than 0,1 % by weight.

Indoor environment

The product is low-emitting and tested according to Swedish Möbelfakta.

Additional environmental information

Key environmental indicators for variants for this EPD: Cradle to Gate analyse from A1 to A3

Variant number	Global warming (kg CO2)	Total energy use (MJ)	Share of recycled material in product(%)
Jackie chair, upholstered	30,43	696,88	0,26
Jackie armchair	20,19	487,64	0,21
Jackie armchair, upholstered	31,97	717,98	0,27

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

 $ISO\ 21930: 2017\ Sustainability\ in\ buildings\ and\ civil\ engineering\ works\ -\ Core\ rules\ for\ environmental\ product\ declarations\ of\ construction\ products.$

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

lversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

© epd-norway Global Program Operator	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo,Norway	Phone: e-mail: web:	+47 23 08 80 00 post@epd-norge.no www.epd-norge.no
NC	Owner of the declaration	Phone:	+46 140 38 40 60
	NC Nordic Care AB	e-mail:	moa.u@ncnordiccare.se
	Ydrevägen 23, Box 30 SE 573 21 Tranås	web:	www.ncnordiccare.se
LCA,	Author of the Life Cycle Assessment	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@ lca.no
	Dokka 6B 1671 Kråkerøy	web:	www.lca.no
LCA	Developer of EPD generator	Phone:	+47 916 50 916
	LCA.no AS	e-mail:	post@lca.no
	Dokka 1C 1671 Kråkerøy	web:	www.lca.no